

	Description	Qty.	Part #
•	Rafter Poles 34.9"	10	800240
	Rafter Poles 34.9"	10	800241
• •	Upright Poles 39.4"	10	800243
•	Upright Poles 39.4"	10	10093
· · · · · ·	Top Cross Rails 40"	12	10161
	Top Cross Rails 38.2"	12	800242
	(Top Bend, shallow bend) 3-Way Frame Connectors	2	10046
	4-Way Frame Connectors	3	10048
	(Side Bend, sharp bend) 3-Way Frame Connectors	4	10045
	4-Way Frame Connectors	6	10047
	All-Weather Cover	1	10059
	Foot Plates	10	10050
	Bungee Cord	32	10066
	Short Pins w/rings - 1/4" x 2 ^{1/4} " Long Pins w/rings - 1/4" x 2 ^{7/8} "	6 10	10051 10052
	Twist Tite TM Set (bungee & S hook)	4	10056
C	Anchor	10	10431

ATTENTION:

BOLTS ARE NOT
NEEDED OR
INCLUDED FOR EVERY
CONNECTION BUT
MAY BE PURCHASED
BY CALLING THE
NUMBER BELOW

FOR MISSING,
REPLACEMENT PARTS
OR
QUESTIONS
PLEASE CONTACT

CONSUMER SUPPORT 1-800-524-9970




150 Callender Road Watertown, CT 06795

Manufactured Under U.S. Patent's D415,571 D409,310 D430,306 D414,564 Other Patents Pending

WARNING!

Use CAUTION when assembling this unit. Manufacturer requires the use of safety goggles during assembly. Bungees are under extreme tension and may snap out of your hand and cause injury. Be aware of poles over your head during assembly that may not be secured, and could fall and cause injury.


Frame Assembly Overview

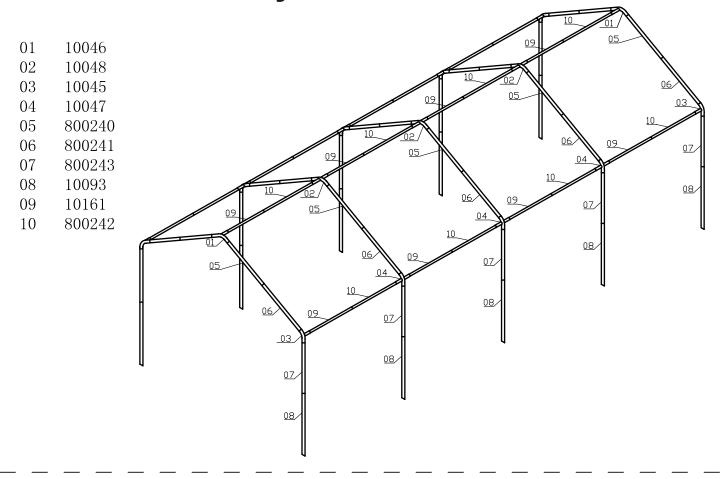



1. Pre-Assembly

Assembly is easiest if you layout all parts as shown in the area you intend to erect the shelter.

Keep all non pipe parts on a tarp or box top.






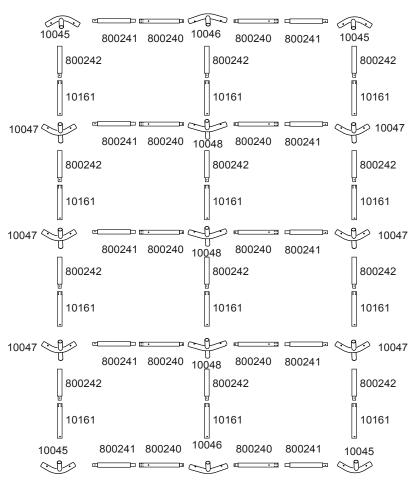


2. Connect Pipes


Start with the center, then assemble each side.

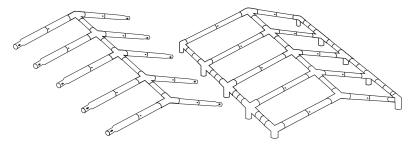

4. Securing Legs

- A. To secure the middle legs to the roof assembly insert the short pins thru the hole at the bottom of each of the 4-way connectors.
- B. You may need to rotate the leg to align the holes.
- C. This will complete the leg assembly for this side.
- D. Repeat the above procedure for the other side of the shelter.







3. Attaching Legs

Assemble the upright sections and lay them next to the canopy near each of the 3 & 4 way connectors.

Note: Reference the diagram below. Insert one middle legs on one side of the frame, swedged end up, then the end legs on that same side. Repeat for the other side.







5. Attaching & Securing Base Feet

- A. Start by lifting each leg high enough to slide the foot beneath and onto the base of the leg.
- B. Once the base is on the leg rotate the base until the hole in the leg aligns with the hole in the base.
- C. Insert the long pins 10052 through hole to secure base to middle legs.
- D. Repeat this for each middle leg.
- E. Locate a suitable location to place one anchor as shown in the illustration into each of the base feet until the round end of the anchor touches the base feet.



Place cover over frame so that the grommeted portion is face down, this allows the valance to wrap around and cover the frame eaves.







7. Twist Tite™

7.1 To get your cover to fit snugly over the frame, "twist" each corner leg pole equally until the cover becomes very tight. (picture A). Make sure to line up the hole in the top of the leg with the hole in the corner side bends.

7.2 Picture B To keep the leg in place, wrap the bungee cord around the cross rail, insert "S" hook into lined up hole of leg pole and 3 way connector. Do this for each corner.







8. Securing Cover

Working inside, beneath the cover, begin with the corners. Insert the cord of the bungee-ball through the grommet and around the Cross Pole, then around the ball. By doing this from the inside it will hide the bungee-ball and give a cleaner look. When all 4 corners are secured, work from side to side to get an even fit.

Repeat 5.C to secure the corner legs with long pins.





WARNINGS, CAUTIONS, CARE & CLEANING

Warning!

Prior to installation, check all local and municipal laws regarding these shelters.

Choose your shelter's location carefully.

Check for overhead utility lines, branches, etc.

Do NOT install near roofs or other structures that may shed snow or ice onto shelter.

Do NOT hang objects from the roof structure or cables.

Do NOT smoke or use open flame devices near the shelter.

Do NOT store flammable liquids (eg. Gasoline, Kerosene, etc.) in your shelter.

Do NOT expose top or sides to open fire or flame.

Do NOT use barbeque grills, fire pits, deep fryers or smokers inside this shelter.

Be sure to remove any accumulated snow from roof. Care should be used when removing snow to prevent punctures being made in the cover with rakes, shovels, etc.

Bungee cords are under extreme tension. Please use caution when applying as they may snap out of your hand and cause injury. Manufacturer requires the use of safety goggles during assembly.

Caution!

This shelter is intended to protect against the effects of sun, rain, tree sap, bird droppings, light snow, etc.

It is not designed to hold the loads that can accompany heavy wind, deep snow or ice storms.

Proper anchoring is the responsibility of the user.

Please read and understand all warnings prior to permanent installation.

Any canopy that is not anchored securely or properly will fly away. We will not be responsible for any canopy that blows away. Proper anchoring is your responsibility.

Your canopy's cover can be quickly removed if needed when you know that a strong or severe weather front is approaching.

Care & Cleaning

Bungee cords are under extreme tension. Please use caution when applying as they may snap out of your hand and cause injury. Safety goggles must be worn when securing bungees.

During the first few months of use, it will be necessary to tighten the cover a few times.

Be sure that the cover is kept tight, loose fabric will deteriorate quickly.

Do NOT apply any "Protect & Shine" type products to the cover and ends or use any harsh or abrasive cleaners. The cover may be cleaned with mild soap and water.